

PZ 013 - low draining channel for tile floor



The PZ 013 channel has horizontal rims for water-proofing and to fit under tile flooring(not intended for installation along the wall). The channel outlet is located in the middle and the overall height including the outlet is 100 mm. Direction of the outlet can be set revolvingly. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recommned WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1).

Rating: Not Rated Yet

[Ask a question about this product](#)

Manufacturer: [AZP Brno](#)

Description The PZ 013 channel has horizontal rims for water-proofing and to fit under tile flooring(not intended for installation along the wall). The channel outlet is located in the middle and the overall height including the outlet is 100 mm. Direction of the outlet can be set revolvingly. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recommned WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1). Complete delivery

1. st.steel channel
2. st.steel outlet including waste trap
3. grid

Requirements for setting up the construction


1. Suitable hole to rectify the channel
2. Downpipe prepared according to drawing
3. Waterproofing prepared according to drawing

Download information about the product

- [PZ 013 data for projectants - \(44 kB \)](#)

Basic technical information	Overall dimensions including rims	850 (950) x 130 x 100 mm
	Dimensions of grid	791 (891) x 70 mm
	Outlet	st.steel, d = 40 mm, revolving 360°
	Overall depth necessary for installation	100 mm
	Material	st.steel AISI 304 (other per order)

Figures

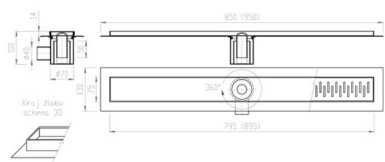

Reviews

There are yet no reviews for this product.